


Corrediças







GSS-04

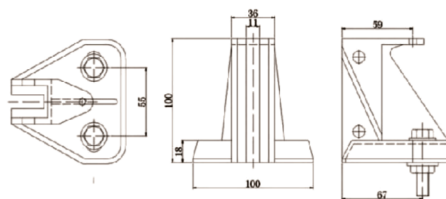




GSS-20

GSS-21



GSS-23

GSS-24

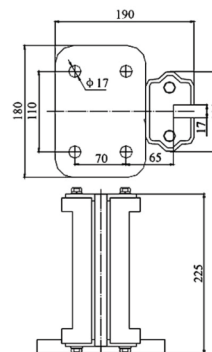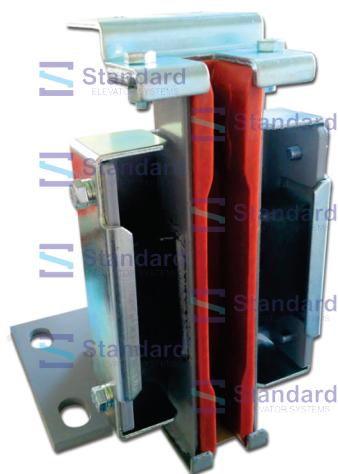

MODELO	APLICAÇÃO RECOMENDADA	CARGA ÚTIL (Q) (Kg)	VELOCIDADE NOMINAL (m/s)	GUIA (NARIZ) mm
GSS-04-1P7-5MM	Contrapeso	800	≤1,75	5
GSS-20-2P5-10MM	Contrapeso	1.250	≤2,5	10
GSS-20-2P5-16MM	Contrapeso	1.250	≤2,5	16
GSS-21-2P0-10MM	Cabina	1.250	≤2	10
GSS-21-2P0-16MM	Cabina	1.250	≤2	16
GSS-23-2P0-10MM	Cabina	1.600	≤2	10
GSS-23-2P0-16MM	Cabina	1.600	≤2	16
GSS-24-0P6-10MM	Contrapeso	2.500	≤0,63	10
GSS-24-0P6-16MM	Contrapeso	2.500	≤0,63	16